
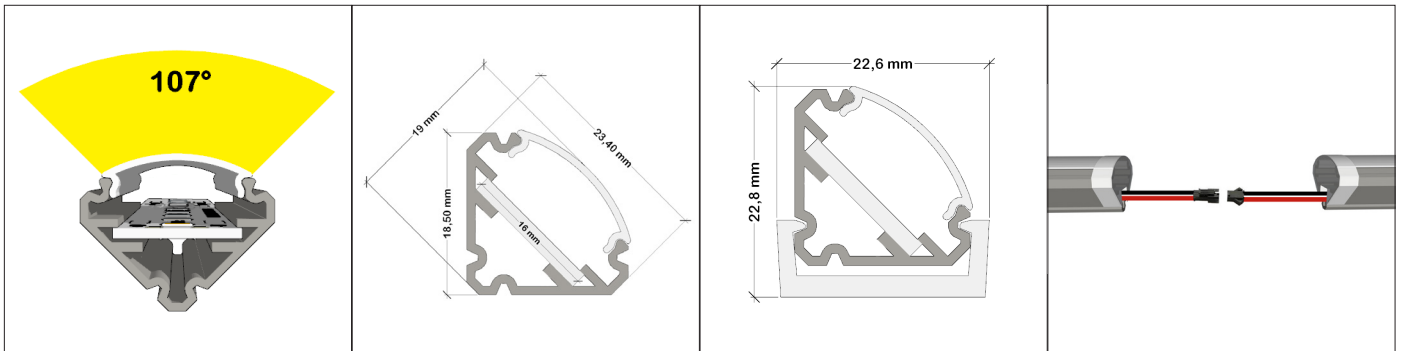



Casing ALU — Diffuser PC — OSRAM On Board — JTLSMX 2835 — System Productivity 114 lm/W — 3SDCM — CR180+ — CR190+ Optional Available

Dimmable — 12V — 24V

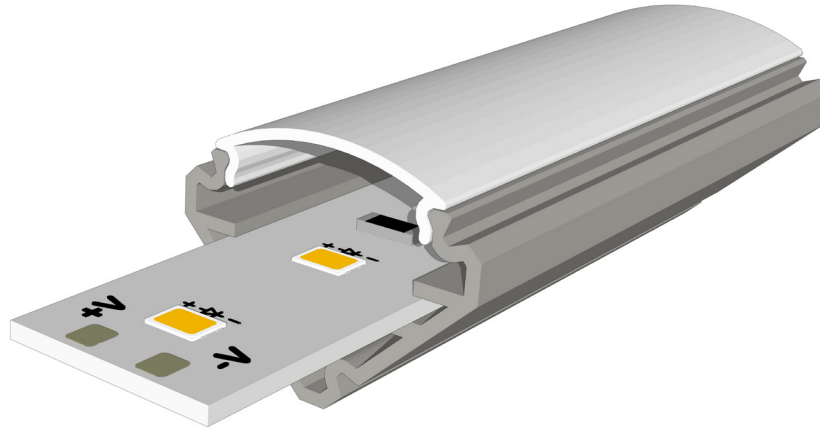

Product Code	mt. / LED Quantity	Vf typ.	If typ.	Consumption (W/mt.)	Colour CCT (Kelvin)	Luminous Flux(lm/mt.)	Productivity of the Ledbar
UCL72DR-72LED-12V	72 LED/mt.	12 V	1.16 A/mt.	14 W/mt.	2700K	1275 lm	91 lm/W
					3000K	1330 lm	95 lm/W
					4000K	1400 lm	100 lm/W
					6500K	1400 lm	100 lm/W
UCL70DR-70LED-24V	70 LED/mt.	24 V	0.58 A/mt.	14 W/mt.	2700K	1460 lm	104 lm/W
					3000K	1515 lm	108 lm/W
					4000K	1600 lm	114 lm/W
					6500K	1600 lm	114 lm/W

* Production tolerance of luminous flux and productivity: ±10%