
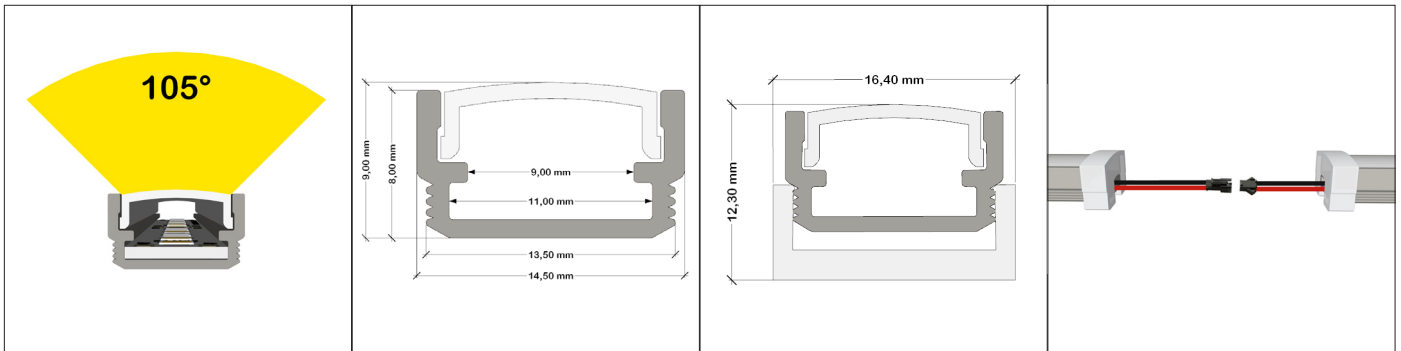



Casing ALU — Diffuser PC — OSRAM On Board — JTLSMX 2835 — System Productivity 106 lm/W — 3SDCM — CRI80+ — CRI90+ Optional Available

Dimmable

24V

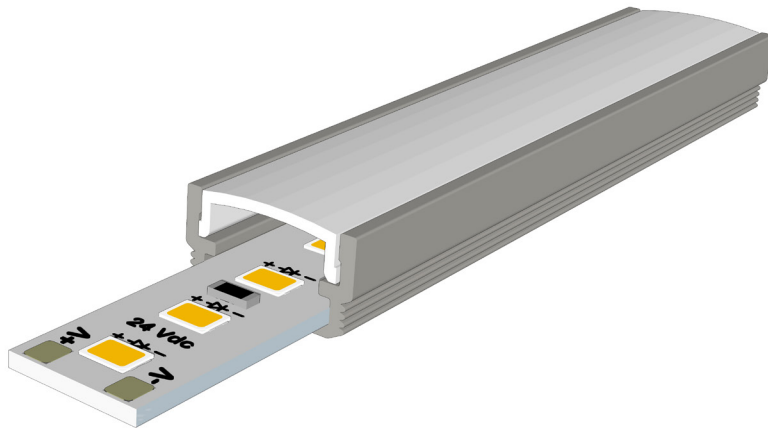

Product Code	mt. / LED Quantity	V _f typ.	I _f typ.	Consumption (W/mt.)	Colour CCT (Kelvin)	Luminous Flux(lm/mt.)	Productivity of the Ledbar
SLL120DR-120LED-24V	120 LED/mt.	24 V	0.29 A/mt.	7 W/mt.	2700K	680 lm	97 lm/W
					3000K	700 lm	100 lm/W
					4000K	745 lm	106 lm/W
					6500K	745 lm	106 lm/W
			0.50 A/mt.	12 W/mt.	2700K	1115 lm	93 lm/W
					3000K	1155 lm	96 lm/W
					4000K	1225 lm	102 lm/W
					6500K	1225 lm	102 lm/W

* Production tolerance of luminous flux and productivity: ±10%