

Technical Data

Beam Angle	120°
Ambient Temp. (Ta)	-30...+50°C
Tp Rated	+65°C
Tc	+85°C
Eyesafety Report	EIC 62471
Life Test Report	EIS LM-80
LVD Test Report	EIC 62031
UL Compliant	E349212
Thermal Conductivity	1.05W/mk

SAMSUNG
On Board

LM281B+
2835

ANSI
C78.377A
Colour
Tolerance

System
Efficiency
176lm/W


CRI80+

Constant
Current

ALU
Thermal
Material

Dimmable

CRI90+
Optional
Available

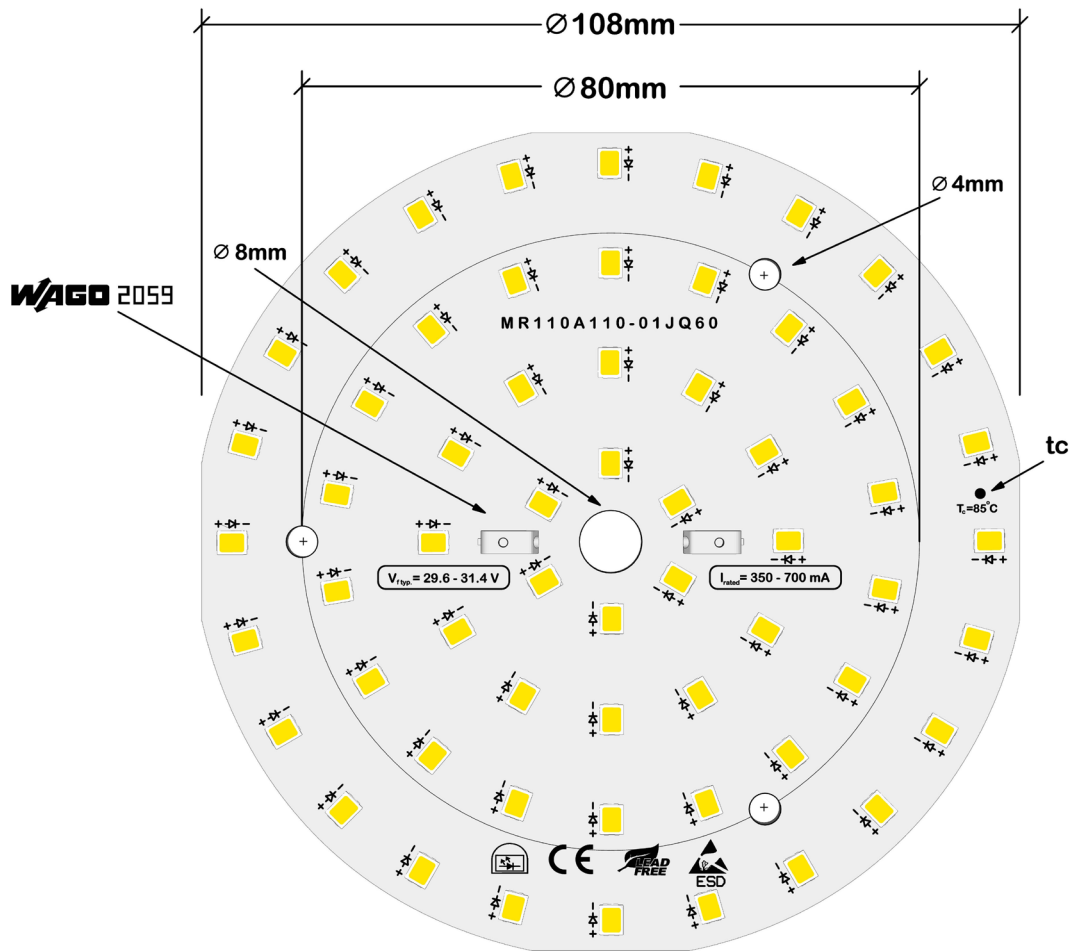

Product Code	LED Quantity	V _f typ.	I _f	Consumption (W)	Color CCT (Kelvin)	Luminous Flux(lm) T _p :25°C	Bin (Rank) Code	Efficiency of the Module
MR110A110-01JQ60	60 LED	28.4 V	500mA	14.2 W	2700K	2300lm	SE	162lm/W
					3000K	2370lm		167lm/W
					4000K	2500lm		176lm/W
					6500K	2500lm		176lm/W
	29.0 V	700mA	20.3 W	2700K	3110lm	153lm/W		
				3000K	3210lm	158lm/W		
				4000K	3370lm	166lm/W		
				6500K	3370lm	166lm/W		

* Production tolerance of luminous flux and efficiency: ±10%