
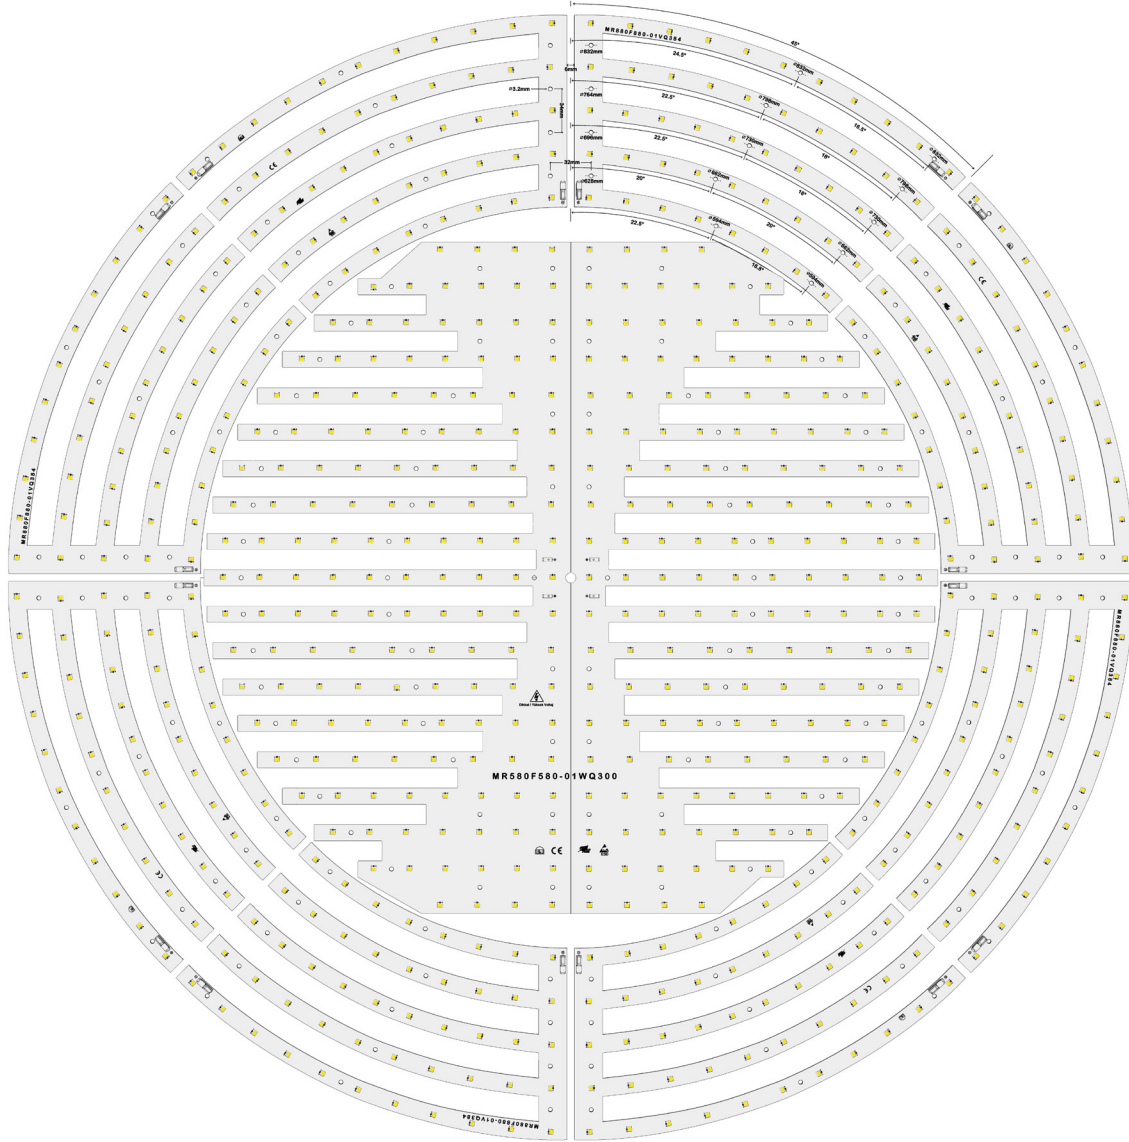


Technical Data

Beam Angle	120°
Ambient Temperature (Ta)	-30...+50°C
Tp Rated	+65°C
Tc	+85°C
Photobiological Test Report	EIC 62471
Life Test Report	EIS LM-80

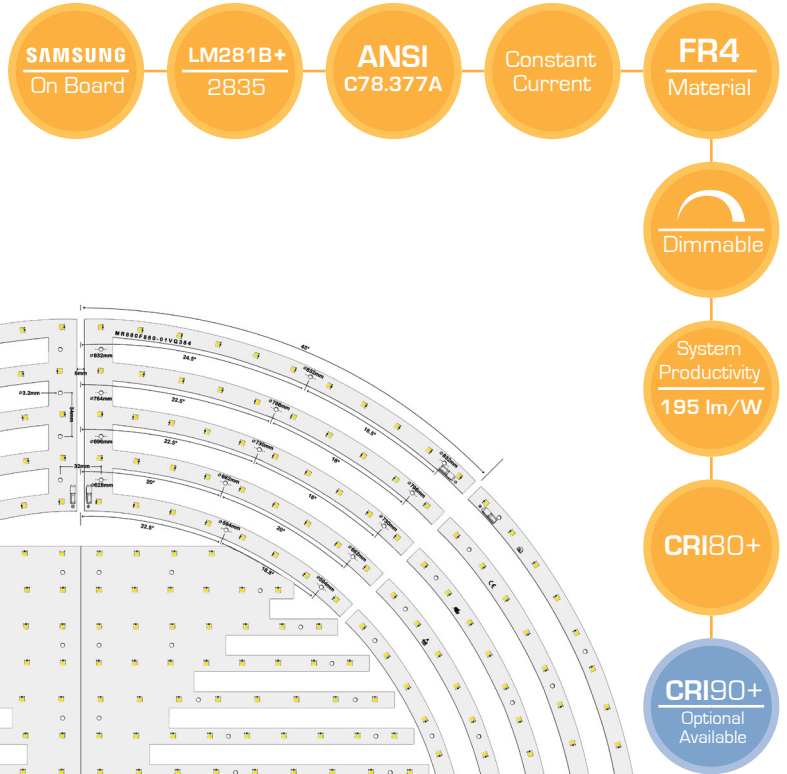

Product Code	LED Quantity	Vf typ.	If typ.	Consumption (W)	Color CCT (Kelvin)	Luminous Flux(lm)	Bin Code	Productivity of the Module
MR880F880-01VQ384	684 LED	308.9V	200mA	61.8W	2700K	11120lm	SE	180lm/W
					3000K	11490lm		186lm/W
					4000K	12050lm		195lm/W
					6500K	12050lm		195lm/W
	313.5V	300mA	94.1W	2700K	16280lm	SE	173lm/W	
				3000K	16840lm		179lm/W	
				4000K	17690lm		188lm/W	
				6500K	17690lm		188lm/W	

* Production tolerance of luminous flux and efficiency: ±10%