
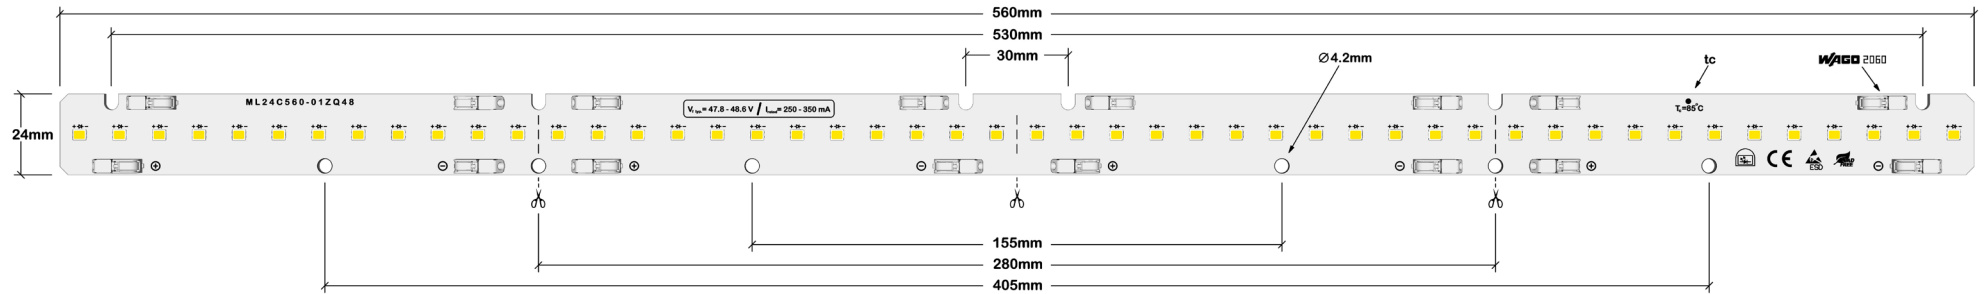


Technical Data

Beam Angle	120°
Ambient Temp. (Ta)	-30...+50°C
Tp rated	+65°C
Tc	+85°C
Eyesafety Report	EIC 62471
Life Test Report	EIS LM-80
LVD Test Report	EIC 62031
UL Compliant	E349212

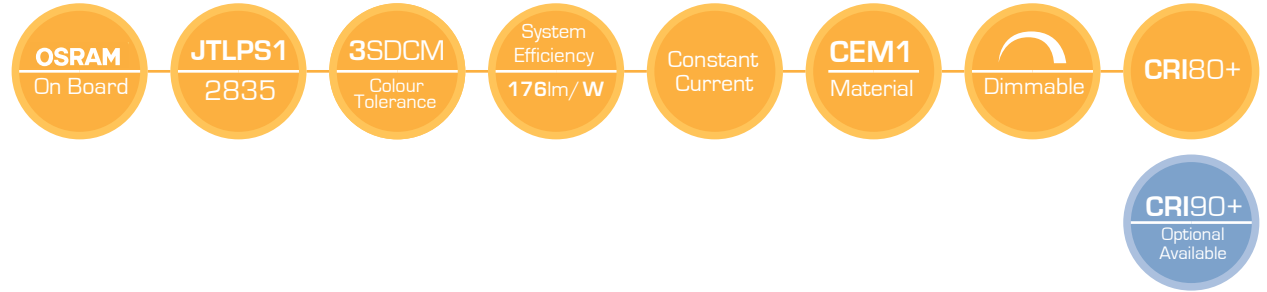

Product Code	LED Quantity	V _f typ.	I _f	Consumption (W)	Color CCT (Kelvin)	Luminous Flux(lm) Tp:25°C	Bin (Rank) Code	Efficiency of the Module
ML24C560-01ZQ48	48 LED	45.4 V	250mA	11.4 W	2700K	1850lm	KK	162lm/W
					3000K	1900lm	KL	167lm/W
					4000K	2010lm	KM	176lm/W
					6500K	2010lm	KM	176lm/W
		46.4 V	350mA	16.2 W	2700K	2480lm	KK	153lm/W
					3000K	2560lm	KL	158lm/W
					4000K	2690lm	KM	166lm/W
					6500K	2690lm	KM	166lm/W

* Production tolerance of luminous flux and efficiency: ±10%